

Baseus Elf Digital Display Fast Charge Power Bank  
20000mAh 65W

## User Manual

Please read this user manual carefully before use and keep it properly

### 1. Product Parameter


Name: Power Bank  
Model No.: PJJL65C  
Battery: Lithium-ion polymer battery  
Capacity: 5000mAh/14.8V/74Wh(20000mAh/3.7V)  
Rated capacity: 12000mAh (5-3A)  
Energy conversion rate:  $\geq 75\%$   
Type-C/Type-C cable input: 5V/9V/12V/15V-3A, 20V-3.25A  
Type-C/Type-C cable output: 5V/9V/12V/15V-3A, 20V-3.25A  
USB1/USB2 output: 4.5V-5A(SCP), 5V-4.5A(SCP), 5V/9V-3A, 12V-2.5A  
Type-C+Type-C cable output: 20W+45W  
USB1+USB2 output: 5V-3A  
Type-C/Type-C cable +USB1/USB2 output: 45W+18W  
Type-C+Type-C cable +USB1/USB2 output: 20W+30W+15W  
Type-C+Type-C cable +(USB1+USB2)output: 20W+30W+15W  
Total 5V output: 5V-9A  
Size: 152.4\*68\*28.3mm  
weight: About 420g

\*The above data are measured by the Baseus laboratory, the actual use will be slightly different depending on the specific circumstances

### 2. Packing List

- Power Bank \*1
- User Manual \*1
- Warranty Card \*1

### 3. Product Diagram

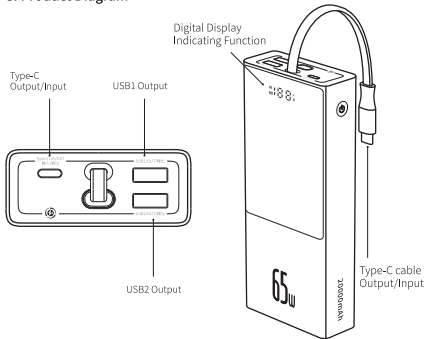

### 4. Product Description

This product is a high-power digital display fast charging mobile power supply with Type-C cable input and output. It has Type-C cable bidirectional 65W fast charging, compatible with Apple PD fast charging, Huawei SCP 22.5W super fast charging, Samsung AFC, QC3.0, FCP, PE and other fast charging protocols, dual input and four output, and can charge four devices at the same time. The product has the characteristics of power, voltage, current digital display, built-in over-current, over voltage, over temperature, short circuit protection and other multiple safety protection circuit can charge most laptops and mobile phones more quickly.

### 5. Instructions for the use of products

#### 5.1 Elf digital display fast charging power bank charges laptop or other digital devices

- Check whether the charging voltage of the digital product matches the output voltage of the elf digital display fast charging power bank.
- Select the original charging cable of the digital product, one end is connected with the digital product, and the other end is connected with the output port of the elf digital display fast charging power bank. The elf digital display fast charging power bank will automatically turn on to charge the digital product, and the power indicator is always on.

#### 5.2 Charging the Elf digital display fast charging power bank with charger

- Select the charging cable of Type-C interface to connect with the input port of Type-C of elf digital display fast charging power bank.
- Connect the charging line with the charger, and the LED power indicator starts to flash, indicating that the elf digital display fast charging mobile power supply is charging, and the LED light is always on after it is fully charged (For a better charging experience, it is recommended to use it with Baseus 65W or higher power charger.)

### 6. Use environment

Use ambient temperature: non-tropical area below 0°C to 35 °C  
Storage ambient temperatures: 0 °C to 40 °C degrees Celsius

### 7. Icon description


The 5-year icon refers to the "valid environment-friendly use period", not the product quality assurance period. Electronic products contain toxic and harmful substances such as lead, mercury and cadmium. The overdue use of these products may lead to leakage or mutation of these toxic and harmful substances, and cause environment pollution or serious damage to people and property. The term of "environment-friendly use period" means that all electronic products shall be used within this validity period. We are free of any responsibility against safety issues caused by using the product beyond its safe service life.

### 8. Safety Warning Instructions

Please read all instructions and warnings before using this product. Non-standard use will damage the product or personal safety.

- Due to the existence of conversion efficiency, so rated output capacity is less than battery capacity .
- When you need to check the power, press the power button once and the LED indicator lights up to show the current power. In the connectionless state, the power will automatically sleep after about 30 seconds.
- Please charge your power bank periodically (at least one time with 5 months recommended) in order to maintain its long service life.
- Improper use of the product can easily cause damage to the product or may endanger personal and property safety.
- Consumer shall be liable for any personal and property damage resulted from their improper use against the user manual or ignoring the warning, to which our company will not bear any legal liability.
- Disintegration of this product by non-professionals is strictly prohibited.
- Use of household appliances or loads in excess of the output current of this product shall be avoided (no output due to circuit protection).
- Intense physical actions including knocking, throwing, trampling on and squeezing, etc. shall be avoided.

### 9. Statement on Toxic and Hazardous Substances in Electronic Information Products

Part Description	Toxic or hazardous substances and elements 					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent chromium (Cr VI)	Polybrominated biphenyls (PBB)	Polybrominated diphenyl ethers (PBDE)
PCB	X	○	○	○	○	○
Electrode	○	○	○	○	○	○
Battery	X	○	○	○	○	○
Casing	○	○	○	○	○	○

This form is compiled in accordance with SJ/T 11364.

O: Indicates that contents of the toxic and hazardous substances in all homogeneous materials are below the limit requirements specified by GB/T 26572 standard.

X: Indicates that contents of the toxic and hazardous substances exceed the limit requirements specified by GB/T 26572 standard in at least one homogeneous material of the component.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.  
NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



Shenzhen Times Innovation Technology Co., Ltd.  
Add: 5th Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd,  
Gangtuo Community, Bantian Street, Longgang District, Shenzhen  
Executive Standard: GB/T 35590-2017  
Hotline: +86-4000-712-711 Website: www.baseus.com

